

# FLORAL BREEZE Equipment . . .

## WINDMASTER FANS

**AERODYNAMIC DESIGN**—Six-bladed propeller with exclusive cambered air foil design delivers more air under pressure; protects motor from over-loading. Blade assembly precision balanced to eliminate vibration.


**STREAMLINED ORIFICE**—Special design insures high capacity air flow and quiet operation.

**CERTIFIED AIR DELIVERY RATINGS**—Air delivery ratings guaranteed to be in accordance with the Standard Test Code for Centrifugal and Propeller Fans and conform with the U. S. Department of Commerce Standard No. C S 178-51.


**HEAVY DUTY CONSTRUCTION**—Heavy gauge, all-steel, all-welded frame and blade construction. Blades safety-locked on solid steel shaft. Each fan is factory tested and shipped fully assembled, ready for installation.

**DEPENDABLE PERFORMANCE** — Rubber-mounted sealed ball bearings on fan require no servicing. All fans have heavy, continuous duty motors with sealed ball bearings for long life. Industrial type V belts.

**CORROSION RESISTANT FINISH**—Special zinc chromate primer and "Durantite" enamel on blades and frame for maximum protection.

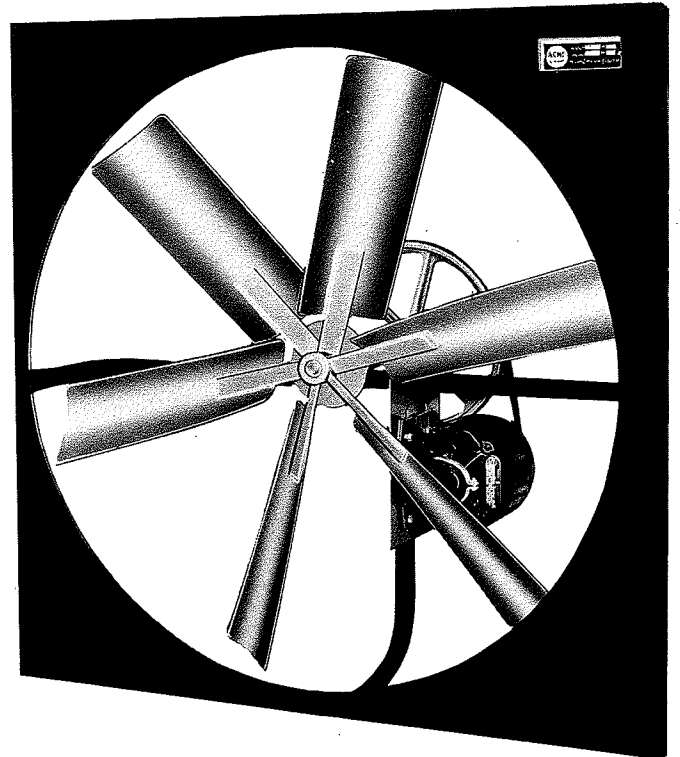

*All WINDMASTER Fans are guaranteed for one year against defects in workmanship and materials.*

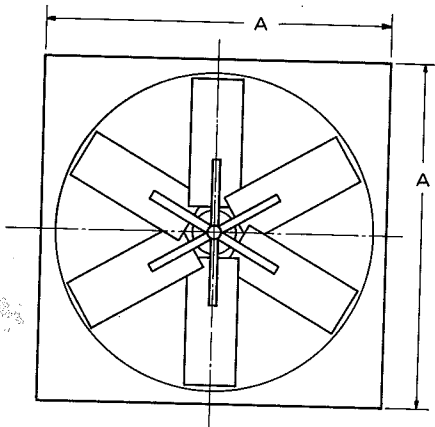

Fan Size	Fan Model	HP	RPM	Air Delivery		A	Sq. Ft. Pad Area	Approx. Ship. Wt.
				Free Air	0.1" SP			
24"	DS24E	1/4	573	5800	4900	28"	33	78 lbs.
	DS24F	1/3	630	6400	5600		37	84
	DS24G	1/2	688	7000	6300		42	88
	DS24H	3/4	775	7900	7200		48	93
30"	DS30E	1/4	430	7800	6100	34"	40	93
	DS30F	1/3	473	8600	7200		48	99
	DS30G	1/2	516	9400	8100		54	103
	DS30H	3/4	580	10500	9400		62	108
36"	DS36E	1/4	344	10400	7800	40"	52	103
	DS36F	1/3	378	11500	9300		62	109
	DS36G	1/2	412	12500	10600		70	113
	DS36H	3/4	458	13900	12200		81	118
42"	DS42F	1/3	329	13700	10200	46"	68	125
	DS42G	1/2	358	14900	12000		80	129
	DS42H	3/4	400	16600	14200		94	134
48"	DS48G	1/2	286	18200	13400	54"	89	190
	DS48H	3/4	320	20300	16400		109	195